

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

F04C 11/00, E21B 4/02

A1

(11) International Publication Number:

WO 99/20904

(43) International Publication Date:

29 April 1999 (29.04.99)

(21) International Application Number: PCT/NL98/00598

(22) International Filing Date: 19 October 1998 (19.10.98)

(30) Priority Data:

1007327	21 October 1997 (21.10.97)	NL
1007405	30 October 1997 (30.10.97)	NL
1007613	25 November 1997 (25.11.97)	NL

(71)(72) Applicant and Inventor: GRUPPING, Arnold; Willem, Josephus [NL/NL]; Anjelierenlaan 3, NL-2111 BP Aerdenhout (NL).

(74) Agent: BROOKHUIS, H., J., A.; Van Exter Polak & Charlouis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM; KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: DOWNHOLE ROLLER VANE MOTOR AND ROLLER VANE PUMP

(57) Abstract

A roller vane motor for downhole drilling comprises a housing (1) and a rotor (2). The housing contains wing deflector cams (5) that divide the space between housing and rotor into chambers (8a, b). The rotor is equipped with cylindrical rollers (7) in recesses (6), which rollers can move between an extended and a retracted position. Drilling fluid enters the chamber parts (8a) through inlet ports (10) in the upper bearing part of the housing (1) and pushes rollers (7¹) into their extended position and in a clockwise direction, making the rotor turn, whilst drilling fluid of lower pressure is pushed from the corresponding chamber parts (8b) through outlet ports (9) in the lower bearing part of the housing (1) and further to the drill bit below. When the rollers (7¹) reach the wing deflector cams (5) they are forced into the retracted position, their task being taken over by rollers (7²).

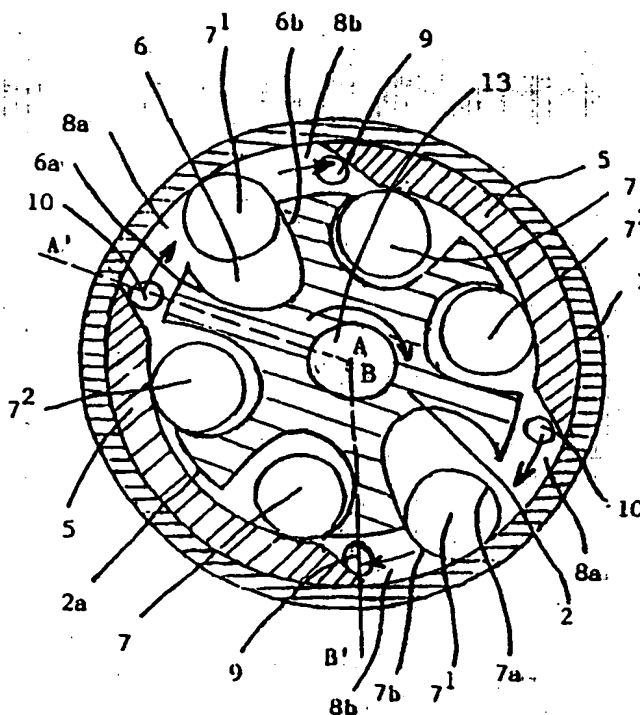

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

DOWNHOLE ROLLER VANE MOTOR AND ROLLER VANE PUMP

The invention relates to a hydraulically or pneumatically driven roller vane motor for vertical, directional and horizontal drilling and well cleaning/repairing, to a roller vane production motor for driving a downhole rotating pump and to
5 a roller vane pump, suitable for pumping oil and/or water from a subterranean reservoir or for pumping up water from a surface reservoir.

To drive drill bits, it is known to use downhole roller vane motors. These motors are driven by the drilling mud that is
10 pumped down through the drill string to lubricate and cool the bit and to carry drill cuttings back to the ground surface through the annular space between the drill string and the borehole wall.

Roller vane motors with inner and outer housing and with the
15 inlet/outlet ports in the inner housing are described in WO 93/08374. Roller vane motors with combined inner and outer housing, with inlet ports in the rotor and outlet ports in the housing are described in WO 94/16198.

In the above motors, rollers that are located in the extended
20 position in recesses in the rotor are pushed by the drilling mud in chambers between rotor and (inner) housing from inlet ports towards outlet ports in a clockwise direction. Rollers that are not pushed by the drilling mud towards an outlet port are not subjected to the mud pressure since they have been
25 forced into a retracted position by longitudinally extending wing deflector cams along the inner wall surface of the (inner) housing.

Advantages of the known roller vane motor with combined inner and outer housing compared to the roller vane motor with both
30 inner and outer housing are its simpler construction and the greater torque per unit length of the motor.

A drawback of the known roller vane motor with combined inner and outer housing is that the pressure drop across the motor must be equal to the pressure drop across the drill bit, since
35 these pressure drops are parallel. Moreover, the flowrate of the drilling mud across the drill bit is reduced.

The present invention provides various embodiments of roller vane motors that overcome this drawback. To this end, the roller vane motors according to the present invention possess the characteristics mentioned in claim 1. In addition, the present invention provides a special roller vane motor for use as a production motor to drive a downhole rotating pump and a special roller vane motor for use as a drilling motor with outer jacket.

Favourable embodiments of these roller vane motors and pumps are described in the sub-claims related thereto. Finally, the present invention provides a method and system for the use of such pumps.

The present invention will be elucidated below in more detail with reference to a drawing, showing in:

fig. 1 a transverse sectional view from above of a roller vane motor with combined inner/outer housing according to the invention;

fig. 2 a schematic longitudinal side view of the motor of fig. 1;

figs. 3 and 4 transverse sectional views from above of other embodiments of the roller vane motor of fig. 1;

fig. 5 a transverse sectional view from above of part of the roller vane motor of fig. 1, showing two special configurations;

fig. 6 a transverse sectional view from above of a roller vane motor for use as a drilling motor with outer jacket;

fig. 7 a schematic longitudinal side view of the motor of fig. 6;

figs. 8, 9, 10 and 11 transverse sectional views from above of roller vane pumps according to the present invention;

fig. 12 and fig. 14 transverse sectional views from above of parts of roller vane motors and roller vane pumps according to the present invention, illustrating special embodiments;

fig. 13 transverse sectional views from above of a roller vane motor according to the present invention, illustrating hydraulic phenomena that occur during the rotation process.

In the roller vane motor with combined inner and outer housing according to the invention, the drawback of parallel pressure drop across the motor and the drill bit is elimi-

nated by locating the inlet and outlet ports in the upper and lower bearing part of the housing instead of in the rotor and in the housing, as shown in figs. 1 and 2. The roller vane motor in these figures comprises a tubular housing 1 and a rotor 2 running in bearing parts 3 and 4 at either end of said housing 1. The housing 1 is connected at its upper end to a non-rotating drill string. The housing 1 is provided with two radially inwardly projecting wall means in the form of longitudinally extending wing deflector cams 5 which, together with said housing 1, form a stator for the roller vane motor. The wing deflector cams 5 together occupy about half the circumference of the housing 1 and have a rising part that runs from the housing 1 towards the concentric part of the wing deflector cam 5 and a falling part that does the reverse. The rotor 2 is connected at its lower end to a drill bit. The rotor 2 is provided at its circumference with three pairs of diametrically opposed and circumferentially spaced slots in the form of roundbottomed recesses 6, in which are disposed elongate longitudinally extending wings in the form of cylindrical rollers 7. The rollers 7 are movable between a retracted position in which they are fully or largely contained within the recesses 6 and a radially projecting position in which they partly project from the outer surface 2a of the rotor 2. Each roller is preferably made of metal, of a resiliently deformable acid- and heat-resistant plastic material, or consists of a metal core with a shell of said plastic material. A generally annular space, defined between the rotor 2 and the housing 1, is divided by the two wing deflector cams 5 into chambers 8a,b. Said chambers 8a,b are connected to outlet ports 9 in the lower bearing part 3 of the housing 1 for the passage of drilling mud therethrough to the drill bit, said outlet ports 9 being positioned at or near the rising part of the wing deflector cams 5. The upper bearing part 4 of the housing 1 is provided with inlet ports 10 for the passage of drilling mud there- through from the drill pipe above to each of the chambers 8a,b, said inlet ports 10 being positioned at or near the falling part of the wing deflector cams 5.

Because the pressure of the drilling mud that enters the cham-

bers 8a,b through the inlet ports 10 is higher than the pressure of the drilling mud that leaves the chambers 8a,b through the outlet ports 9, the rollers 7¹ that are positioned in the chambers 8a,b are sucked outward and pressed against the space 5 between the downstream sides 6b of the recesses 6 in the rotor 2 and the housing 1, thereby dividing the chambers 8a,b into high-pressure parts 8a and lower-pressure parts 8b. The rollers 7¹ are thus exposed to high-pressure drilling mud at their upstream side 7a, entering through the inlet ports 10, thereby exerting a clockwise turning moment on the rotor 2. Two other pairs of rollers are pressed down into their retracted position in the recesses 6 in the rotor 2 by the wing deflector cams 5. When the rotor 2 has turned approximately 30 degrees further in the clockwise direction under the influence of the mud pressure on the first mentioned rollers 7¹ in the chamber parts 8a, the retracted rollers 7² will clear the wing deflector cams 5 and be resiliently restored into their projecting position with their upstream side 7a exposed to the pressure of the drilling mud entering through the inlet ports 10 in the upper bearing part 4, thereby ensuring a continuous driving and rotating force on the rotor 2 with a torque substantially directly proportional to the pressure difference in the drilling mud between the upstream chamber parts 8a and the downstream chamber parts 8b. The drilling mud in the chamber parts 8b is compressed between the advancing downstream sides 7b of the rollers 7¹ and the respective opposing wing deflector cams 5 and is expelled through the outlet ports 9 in the lower bearing part 3 back to a central conduit 13 in the rotor 2. and mixes with another part of the drilling mud that flows through this central conduit 13 directly to the drill bit. It will of course be appreciated that the rollers 7 will in practice tend to roll as the rotor 2 turns, thereby passing over any particulate matter trapped between the rollers 7 and the housing 1 or the wing deflector cams 5 without damage thereto. The central conduit 13 in the rotor 2 may be provided with a regulator, to regulate the relative amounts of drilling mud that pass to the drill bit through the chambers 8a,b of the motor and through said central conduit 13 in the rotor 2.

In the embodiment shown in fig. 3 the outlet ports 9 have been replaced by outlet ports 11 in the housing 1 and the rising part of the wing deflector cams 5, said outlet ports 11 connecting the chamber parts 8b with the annular space 12 outside the housing 1.

In the embodiment shown in fig. 4 the inlet ports 10 have been replaced by inlet ports 14 in the rotor 2, said inlet ports 14 connecting the central conduit 13 in the rotor 2 with the bottoms of the recesses 6.

10 In all the above motors, the number of wing deflector cams 5 may be larger than two, spaced at equal distance along the interior wall surface of the housing 1, and the number of recesses 6 in the rotor 2 with matching rollers 7 may be smaller or larger than six. Preferably, however, the number of
15 rollers 7 should be at least one larger than the number of wing deflector cams 5 and preferably less than twice as large. It will be appreciated that the corners of the rising and falling part of the wing deflector cams 5 may be rounded off and that their slope should be as flat as possible, to bring
20 about a smooth movement of rollers 7 between their retracted and extended position and vice versa. The flatness of these slopes is limited by the requirement that short-circuiting of the flow of drilling mud between inlet and outlet ports must be avoided, both in the chambers 8a,b and in the area
25 between the concentric part of the wing deflector cams 5 and the rotor 2. The inner wall sections of the housing 1 and the concentric section of the wing deflector cams 5 must therefore each have a certain minimum width.

When travelling in their extended position on the inner wall
30 surface of the housing 1, rollers 7 are pressed against the space between said inner wall surface and the outer surface 2a of the rotor 2. To avoid pinching of rollers 7 between said inner wall surface of the housing 1 and the downstream leading sides 6b of the recesses 6 in the rotor 2, it is
35 advantageous to shape these downstream sides 6b such that rollers 7 are in contact with them at the outer surface 2a of the rotor 2. Likewise, to avoid pinching of rollers 7 between the rising part of the wing deflector cams 5 and the

upstream trailing sides 6a of the recesses 6 in the rotor 2, it is advantageous to shape said trailing upstream sides 6a such that rollers 7 on said rising part are in contact with said upstream sides 6a at the outer surface 2a of the rotor 2. Both configurations are illustrated in fig. 5. Also, the diameter of the rollers 7 should be larger than twice the distance between the inner surface of the housing 1 and the outer surface of the rotor 2.

In the embodiments shown in fig. 6 and fig. 7 the outlet ports 11 are located in the housing 1 and the rising part of the wing deflector cams 5. These outlet ports 11 connect the chamber parts 8b with an annular space between the housing 1 and an outer jacket 15, attached to said housing 1. Via this annular space the drilling mud returns through inlet ports 16 to the space inside the housing 1 and further via the central conduit 13 in the rotor 2 to the drill bit.

It will be appreciated that a continuous central conduit 13 in the rotor 2 is only required for drilling motors if the amount of drilling mud required for the drill bit is larger than the amount required to drive the motor. If this is not the case, the central conduit 13 can be omitted or blocked somewhere halfway down the motor.

It will be appreciated that the motors may not only be used for drilling or coring purposes, but also to repair and clean boreholes. Thus, the working fluid need not exclusively be drilling mud but can also consist of other liquids such as e.g. oil or water, of a gas/liquid mixture, or a gas such as e.g. air.

Roller vane motors for drilling purposes as described above can also be used as a production motor for driving a rotating pump to produce fluids from a subterranean reservoir to the ground surface. At its upstream side the housing 1 of the production motor is then attached to a power fluid supply tube that is connected with the ground surface. At its lower side the housing 1 and the rotor 2 are attached to the housing and rotor of a rotating pump. Power fluid and produced fluids from a subterranean reservoir are mixed and pumped to the ground surface together through the annulus outside the power fluid sup-

ply tube or through a production tube parallel with or concentric around the power fluid supply tube. In the embodiments in which the power fluid leaves the production motor inside the housing of the motor, provisions must be made to
5 lead this power fluid back to the annular space 12 outside the motor. In the embodiments in which a central conduit 13 is present in the rotor 2, this central conduit 13 must be closed off or omitted.

Roller vane motors as described above can also be used as
10 roller vane pumps. To this end, the rotor 2 must be attached to and driven by a downhole electromotor in a direction opposite to that of the described motor. Where present, a central conduit 13 in the rotor 2 must be closed off or omitted. An example of a pump with axial fluid inlet and axial fluid
15 discharge is shown in fig. 8. The construction of this pump is similar to that of the motor shown in fig. 1, with the exception that the central conduit 13 in the rotor 2 has been omitted. Fluid is sucked in from the inside of the housing 1 below the pump through outlet ports 9 in the lower bearing
20 ing part 3, that then become inlet ports 9', and is pumped by the rollers 7 via the chambers 8a,b and the inlet ports 10 in the upper bearing part 4, that then become outlet ports 10', to production tubing above the pump and further to the ground surface. The rotation direction of the pump is shown
25 with a curved arrow.

Another example of a roller vane pump is shown in fig. 9. The construction of this pump is similar to that of the motor shown in fig. 3, with the exception of the central conduit 13 in the rotor 2 which has been omitted. In this pump the out-
30 let ports 11 to the annulus 12 outside the housing 1 become inlet ports 11' and the inlet ports 10 in the upper bearing part 4 become outlet ports 10'.

Yet another example of a roller vane pump is shown in fig. 10. The construction of this pump is similar to that of the motor
35 shown in fig. 4. In this pump the outlet ports 9 in the lower bearing part 3 of the housing 1 become inlet ports 9' and the inlet ports 14 in the rotor 2 become outlet ports 14'. The lower end of the central conduit 13 in the rotor 2 must be

closed off in this embodiment.

Roller vane pumps can also be driven by a roller vane production motor. In that case, it is advantageous to use a pump with axial fluid inlet and fluid discharge to the annulus 12 outside the housing 1, as shown in fig. 11. In this embodiment, fluid is sucked in through the inlet ports 9' in the lower bearing part 3 of the housing 1 and is pumped by the rollers 7 via the chambers 8a,b and outlet ports 17 in the housing 1 and the rising part of the wing deflector cams 5 to the annulus 12 outside the housing 1.

All the pumps described above can be adapted in such a way that their direction of rotation is reversed into the clockwise direction and their rotation speed can be adjusted to a desired value by changing the speed of the electromotor or the roller vane production motor.

In a similar way as described for the motors, the shape of the rising and falling part of the wing deflector cams 5, the shape of the recesses 6 and the size of the rollers 7, related to the distance between the inner surface of the housing 1 and the outer surface of the rotor 2, may be optimised to ensure a smooth travel of rollers 7.

As in the motors, also in the pumps described above the number of wing deflector-cams may be larger than two and the number of rollers may be larger or smaller than six.

In the motors and pumps that have been described in the figures 1, 3, 4, 8, 9, 10 and 11 the inlet and/or outlet ports 9,9',10,10' debouch into the chambers 8a,b at or near the rising/falling part of the wing deflector cams 5. This has the disadvantage that the upper or lower side of the rollers 7 temporarily block these ports during rotation of the rotor 2, as a result of which the discharge/supply of drilling mud temporarily stops. This can be remedied by locating these ports partly or wholly behind the edge of the rising/falling part of the wing deflector cams 5. To maintain a continuous connection with the chambers 8a,b, (part of) the rising/falling part must be shortened lengthwise at the side concerned. This embodiment is shown schematically in fig. 12A for an inlet/outlet port 10,10'. Each connection can be widened by creating additional

space behind the inside edge of the concentric part of the wing deflector cam 5. This is schematically shown in fig. 12B for an inlet/outlet port 9,9'.

An analysis of the rotation process shows that vibration problems and stalling of the rotor may occur as a result of hydraulic phenomena both in the roller vane motors and roller vane pumps according to the invention. When rollers mount the rising part or run down the falling part of wing deflector cams, the volume between these rollers and preceding and following rollers changes. To prevent the occurrence of too high pressures between succeeding rollers, the space between these rollers must be continuously in connection with other liquid-filled spaces in the motor or pump when a roller is travelling on a rising or falling part of a wing deflector cam.

Fig. 13A shows a roller 7 that has descended from the falling part of a wing deflector cam 5 and has just reached the inside surface of the housing 1. At that moment, the volume of the chamber part 8a between this roller and the preceding roller 7 on the inside of the housing 1 does not decrease anymore, so that the connection with the inlet port 10 on said falling part can be restricted to the dotted line A-A.

Fig. 13B shows a roller 7 at the end of its rise on the rising part of a wing deflector cam 5. Further rotation of the rotor 2 will tilt this roller 7 onto the concentric section of the wing deflector cam 5. While this happens, the volume between this roller 7 and the preceding roller on the concentric part of the wing deflector cam 5 decreases by V. Because a connection has been established between this space and the outlet port 9 via a small adjacent concentric part of the wing deflector cam 5, this volume can escape to the outlet port 9. Should this connection have been restricted to the rising part of the wing deflector cam 5, then the roller 7, which is travelling on the concentric part of the wing deflector cam 5, would have been pressed against the downstream side 6b of its recess 6, after which the rotor 2 would have come to a standstill as a result of the rapidly increasing pressure between both rollers. Thus, the shortening of the rising/falling part of a

- wing deflector cam 5, in order to make connection with inlet/outlet ports 10,10',11,11', does not have to occupy the full width of said rising/falling part but must be extended to the nearby concentric part of this wing deflector cam 5, as shown
- 5 in fig. 14A for an inlet/outlet port 10,10'.
- With inlet/outlet ports 11,11',17 in the housing 1, the solution of problems with high/low pressure between rollers consists of widening these inlet/outlet ports 11,11',17 such that they occupy a sufficiently wide section of the rising/falling
- 10 part of a wing deflector cam 5, in addition to a small part of its nearby concentric part. Alternatively, each port can be split up into two ports, that cover both sides of such a wide port. This solution is schematically shown for inlet/outlet ports 11,11' in fig. 14B.
- 15 It will be appreciated that other solutions are possible to solve the problems of too high/low pressure in roller vane motors or pumps. With inlet/outlet ports at or near the rising/falling part of a wing deflector cam 5 a solution consists for instance in making one or more grooves in the rising/fal-
- 20 ling part of these wing deflector cams 5.
- In roller vane motors or pumps with inlet/outlet ports 14,14' in the rotor 2 the above-mentioned provisions do not have to be made. In these motors and pumps, the spaces between rollers 7 are at all times connected with other liquid-filled
- 25 spaces in the motor or pump by way of said inlet/outlet ports 14,14'.
- Motors and pumps according to the present invention may be used for various purposes with various fluids. The drilling motors are not only suitable for drilling and coring but also
- 30 for well cleaning/repairing and the present invention includes within its scope drilling, coring and cleaning/repairing apparatus wherein motors of the present invention are used, as well as methods of driving drilling, coring and cleaning/repairing apparatus using motors of the present invention.
- 35 The production motor and pumps are not only suitable for oil-field use but can also be used for producing drinking water, for producing hot water in geothermal projects, or for producing drain water in mining operations such as for instance

surface browncoal mining. They can also be employed in fire-fighting and cooling water installations on offshore platforms using seawater.

The invention includes within its scope therefore both oil
5 and water production installations in which motors and/or pumps of the present invention are used as well as methods to produce water from a subterranean reservoir to the ground surface or to pump up water from a surface water reservoir using a motor and/or pump of the present invention.

C L A I M S

1. Roller vane motor driven by a fluid, or roller vane pump for pumping a fluid, comprising a housing (1) with axial ends located at opposite sides, with in between an imaginary principal axis, and a rotor (2) that rotates around this principal axis in a rotor space inside the housing (1), with an annular space between the rotor (2) and the inner wall of the housing (1), said housing (1) being provided with a plurality of inwardly projecting wing deflector cams (5) that divide the annular space between the rotor (2) and the inner wall of the housing (1) into chambers (8a,b), said rotor (2) being provided with a plurality of recesses (6) located along the circumference of said rotor (2) and extending substantially parallel to the principal axis, each recess (6) having a cylindrical roller (7) that is displaceable from an extended position, in which the roller (7) is in contact with the inner wall of the housing (1) between wing deflector cams (5), to a retracted position, in which the roller (7) is in contact with a wing deflector cam (5), said roller (7) dividing the chambers (8a,b) into a high-pressure chamber part (8a) and a lower-pressure chamber part (8b), each wing deflector cam (5) having a rising part that runs inward from the inner wall of the housing (1) and forces a passing roller (7) from its extended position into its retracted position, and a falling part that runs outward towards the inner wall of the housing (1) and allows a passing roller (7) to move from its retracted position towards its extended position, whereby inlet ports and outlet ports for the driving fluid or the pumped fluid are provided, that are connected to the rotor space, characterised in that between the axial ends of the housing (1) a passage has been provided for passing the driving fluid or the pumped fluid.

2. Roller vane motor or pump as claimed in claim 1, characterised in that the housing (1) at one of its axial ends has a first bearing part (4) for the rotor (2), in which first bearing part (4) at or near each falling part of a wing deflector cam (5) one or more inlet ports (10) are provided, and

that the housing (1) at its other axial end has a second bearing part (3) for the rotor (2), in which second bearing part (3) at or near each rising part of a wing deflector cam (5) one or more outlet ports (9) are provided.

5 3. Roller vane motor as claimed in claim 1 or 2, characterised in that the rotor (2) is provided with a central conduit (13) that is separated from the rotor space and runs the length of the rotor (2) to provide a passage for the driving fluid between the axial ends of the housing (1).

10. 4. Roller vane motor as claimed in claim 1, characterised in that the rotor (2) is provided with a central conduit (13) that is connected with the rotor space by means of inlet ports (14) to the recesses (6) in the rotor (2) for the supply of driving fluid to the rotor space.

15. 5. Roller vane motor as claimed in claim 4, characterised in that the central conduit (13) has been blocked.

6. Roller vane motor as claimed in claim 1, characterised in that the housing (1) at one of its axial ends has a first bearing part (4) for the rotor (2) in which first bearing
20 part (4) at or near each falling part of a wing deflector cam (5) one or more inlet ports (10) are provided, and that the housing (1) at its other axial end has a second bearing part (3) for the rotor (2), and that the housing (1) at or near each rising part of a wing deflector cam (5) is provided with
25 one or more outlet ports (11) that debouch into the outer surface of the housing (1) between its axial ends for the discharge of driving fluid from the rotor space, and that the rotor (2) is provided with a central conduit (13) that is
30 the rotor (2) to provide a passage for the driving fluid between the axial ends of the housing (1). (Fig. 3).

7. Roller vane motor as claimed in claim 1, intended for driving a drill bit, characterised in that the housing (1) at one of its axial ends has a first bearing part (4) for the
35 rotor (2), that the rotor (2) at the side of the first bear-

ing part (4) is provided with a central inlet conduit (13) that is connected with the rotor space by means of inlet ports (14) to the recesses (6) in the rotor (2) for the supply of driving fluid to the rotor space, that the housing (1) has a second bearing part (3) for the rotor (2), and that the housing (1) at or near each rising part of a wing deflector cam (5) is provided with one or more outlet ports (11) that are connected with the rotor space and a connecting channel outside the second bearing part (3), which connecting channel is connected with an internal outlet conduit in the part of the rotor (2) that serves for attaching the drill bit.

8. Roller vane motor as claimed in claim 7, characterised in that the inlet conduit (13) and the outlet conduit are connected inside the rotor (2).

15. 9. Roller vane motor as claimed in claims 3, 4, 6 or 8, characterised in that a regulator is provided for regulating the amount of driving fluid that flows through the conduit in the rotor (2) on the one hand and the amount of driving fluid that flows through the rotor space on the other hand.

20. 10. Roller vane pump as claimed in claim 1, characterised in that the outlet ports (14') are located in the recesses (6) in the rotor (2) and are connected with an outlet conduit (13) in the rotor (2). (Fig. 10).

11. Roller vane motor driven by a fluid, or roller vane pump for pumping a fluid, comprising a housing (1) with axial ends located at opposite sides, with in between an imaginary principal axis, and a rotor (2) that rotates around this principal axis in a rotor space inside the housing (1), with an annular space between the rotor (2) and the inner wall of the housing (1), said housing (1) being provided with a plurality of inwardly projecting wing deflector cams (5) that divide the annular space between the rotor (2) and the inner wall of the housing (1) into chambers (8a,b), said rotor (2) being provided with a plurality of recesses (6) located along the circumference of said rotor (2) and extending substantially parallel to the principal axis, each recess (6) having a cylindrical roller (7) that is displaceable from an extended position,

in which the roller (7) is in contact with the inner wall of the housing (1) between wing deflector cams (5), to a retracted position, in which the roller (7) is in contact with a wing deflector cam (5), said roller (7) dividing the chambers 5 (8a,b) into a high-pressure chamber part (8a) and a lower-pressure chamber part (8b), each wing deflector cam (5) having a rising part that runs inward from the inner wall of the housing (1) and forces a passing roller (7) from its extended position into its retracted position, and a falling
10 part that runs outward towards the inner wall of the housing (1) and allows a passing roller (7) to move from its retracted position towards its extended position, whereby inlet ports for the driving fluid or the pumped fluid are provided, that are connected to the rotor space, characterised in that
15 the housing (1) at one of its axial ends has a first bearing part (4) for the rotor (2), in which first bearing part (4) at or near each falling part of a wing deflector cam (5) one or more inlet ports (10) are provided, and that the housing (1) at its other axial end has a second bearing part (3) for
20 the rotor (2), and that at or near each rising part of a wing deflector cam (5) one or more outlet ports (11) are provided that debouch into the outer surface of the housing (1) between its axial ends.

12. Roller vane motor as claimed in claim 11 and roller
25 vane pump as claimed in claim 11, characterised in that the roller vane pump is driven by the roller vane motor, whereby an axial end of the roller vane motor and an axial end of the roller vane pump are directed towards each other and are coupled in line, and whereby the roller vane motor has
30 inlet ports (10) for the supply of driving fluid at the axial end of its housing (1) that is farthest away from the roller vane pump and outlet ports (11) in the housing (1), and whereby the roller vane pump has inlet ports (10) at the axial end of its housing (1) that is farthest away from
35 the roller vane motor and outlet ports (11) in the housing (1).

13. Roller vane pump for pumping a fluid, comprising a housing (1) with axial ends located at opposite sides, with in between an imaginary principal axis, and a rotor (2) that rotates around this principal axis in a rotor space inside
5 the housing (1), with an annular space between the rotor (2) and the inner wall of the housing (1), said housing (1) being provided with a plurality of inwardly projecting wing deflector cams (5) that divide the annular space between the rotor (2) and the inner wall of the housing (1) into chambers (8a,b),
10 said rotor (2) being provided with a plurality of recesses (6) located along the circumference of said rotor (2) and extending substantially parallel to the principal axis, each recess (6) having a cylindrical roller (7) that is displaceable from an extended position, in which the roller (7) is in contact
15 with the inner wall of the housing (1) between wing deflector cams (5), to a retracted position in which the roller (7) is in contact with a wing deflector cam (5), said roller (7) dividing the chambers (8a,b) into a high-pressure chamber part (8a) and a lower-pressure chamber part (8b), each wing
20 deflector cam (5) having a rising part that runs inward from the inner wall of the housing (1) and forces a passing roller (7) from its extended position into its retracted position, and a falling part that runs outward towards the inner wall of the housing (1) and allows a passing roller (7) to move
25 from its retracted position towards its extended position, whereby inlet ports and outlet ports for the pumped fluid are provided that are connected to the rotor space, characterised in that the housing (1) at one of its axial ends has a first bearing part (4) for the rotor (2) in which first bearing part
30 (4) at or near each rising part of a wing deflector cam (5) one or more outlet ports (10') are provided, that the housing (1) at its other axial end has a second bearing part (3) for the rotor (2), and that at or near each falling part of a wing deflector cam (5) the housing (1) is provided with inlet
35 ports (11') between its axial ends for the supply of fluid to the rotor space. (Fig. 9).

14. Roller vane motor driven by a fluid, or roller vane pump for pumping a fluid, in particular a motor or pump as claimed in one or more of the previous claims, comprising a housing (1) with axial ends located at opposite sides, with
5 in between an imaginary principal axis, and a rotor (2) that rotates around this principal axis in a rotor space inside the housing (1), with an annular space between the rotor (2) and the inner wall of the housing (1), said housing (1) being provided with a plurality of inwardly projecting wing de-
10 flector cams (5) that divide the annular space between the rotor (2) and the inner wall of the housing (1) into chambers (8a,b), said rotor (2) being provided with a plurality of recesses (6) located along the circumference of said rotor (2) and extending substantially parallel to the principal
15 axis, each recess (6) having a cylindrical roller (7) that is displaceable from an extended position, in which the roller (7) is in contact with the inner wall of the housing (1) between wing deflector cams (5), to a retracted position, in which the roller (7) is in contact with a wing deflector cam
20 (5), said roller (7) dividing the chambers (8a,b) into a high-pressure chamber part (8a) and a lower-pressure chamber part (8b), each wing deflector cam (5) having a rising part that runs inward from the inner wall of the housing (1) and forces a passing roller (7) from its extended position into
25 its retracted position, and a falling part that runs towards the inner wall of the housing (1) and allows a passing roller (7) to move from its retracted position towards its extended position, whereby inlet ports and outlet ports for the driving fluid or the pumped fluid are provided, that are connected to
30 the rotor space, characterised in that at the falling part of each wing deflector cam (5) a first passage is provided that, during the movement of a roller (7) down this falling part from the retracted position to the extended position, forms an open connection between the chamber part that is situated
35 ahead of said roller (7) and the chamber part that is situated behind said roller (7).

15. Roller vane motor or roller vane pump as claimed in one or more of the previous claims, characterised in that at the rising part of each wing deflector cam (5) a second passage is provided that, during the movement of a roller (7) up this rising part from the extended position to the retracted position, forms an open connection between the chamber part that is situated ahead of said roller (7) and the chamber part that is situated behind said roller (7).
16. Roller vane motor or roller vane pump as claimed in claims 14 or 15, characterised in that the first passage is formed by a mouth that is connected with the rotor space and with an inlet port (9',10), said mouth covering at least part of the width of the falling part of the wing deflector cam (5) in addition to an adjacent part of the concentric part of said wing deflector cam (5). (Fig. 14A).
17. Roller vane motor or roller vane pump as claimed in any one of claims 14 to 16, characterised in that the second passage is formed by a mouth that is connected with the rotor space and with an outlet port (9,10'), said mouth covering at least part of the width of the rising part of the wing deflector cam (5) in addition to an adjacent part of the concentric part of said wing deflector cam (5). (Fig. 14A).
18. Roller vane motor or roller vane pump as claimed in claim 16 or 17, characterised in that the mouth that is connected with inlet and/or outlet ports (10,10',9,9') is obtained by shortening the rising or falling part concerned of the wing deflector cam (5) in addition to shortening the adjacent part of the concentric part of said wing deflector cam (5).
19. Roller vane motor or roller vane pump as claimed in one or more of claims 16 to 18, characterised in that the inlet and/or outlet ports (10,10',9,9') are provided in bearing parts for the rotor (2) and are located partly or wholly between the edge of the rising/falling part of the wing deflector cams (5) and the inner wall of the housing (1). (Fig. 12A,12B).

20. Roller vane motor or roller vane pump as claimed in claim 16 or 17, characterised in that the first passage or the second passage consists of two separate ports (11, 11', 17). (Fig. 14B).

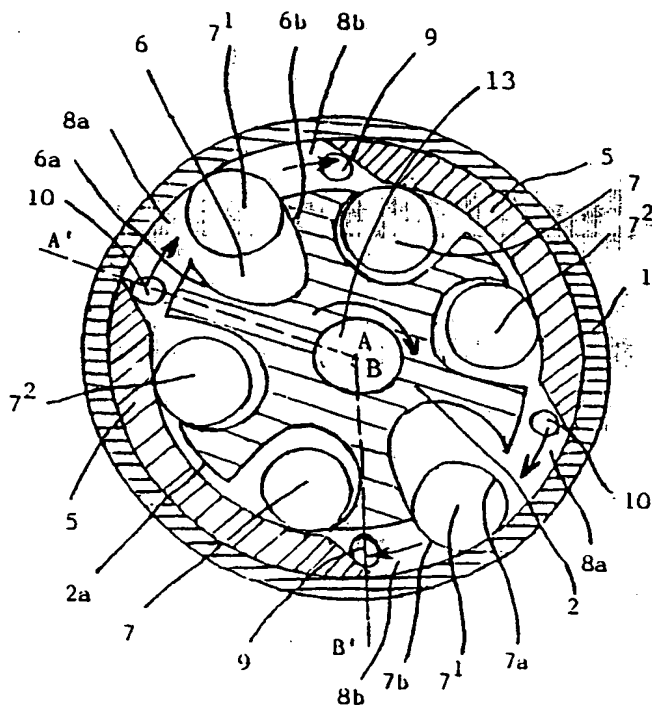


Fig. 1

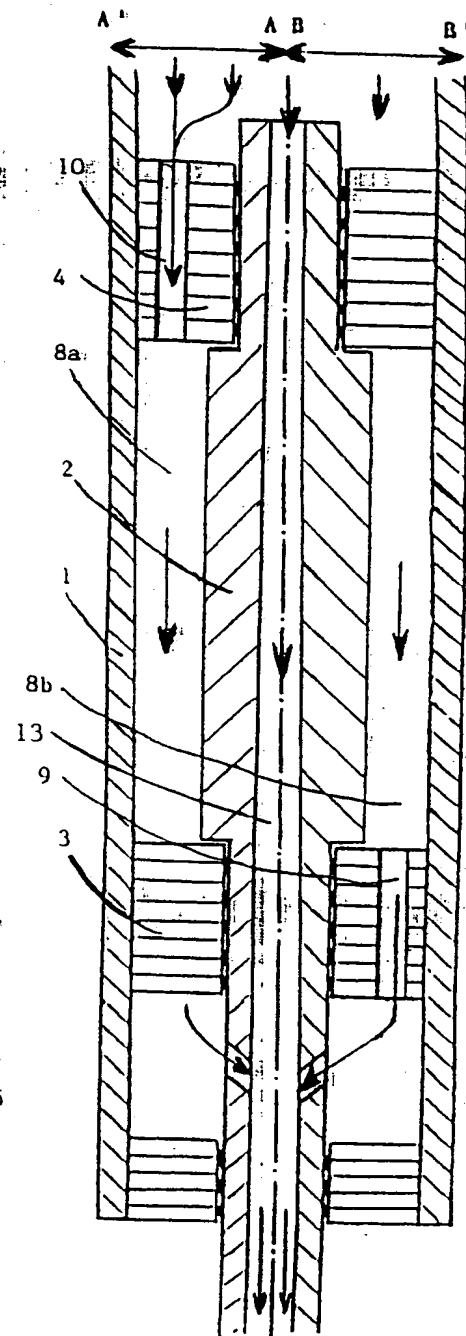


Fig. 2

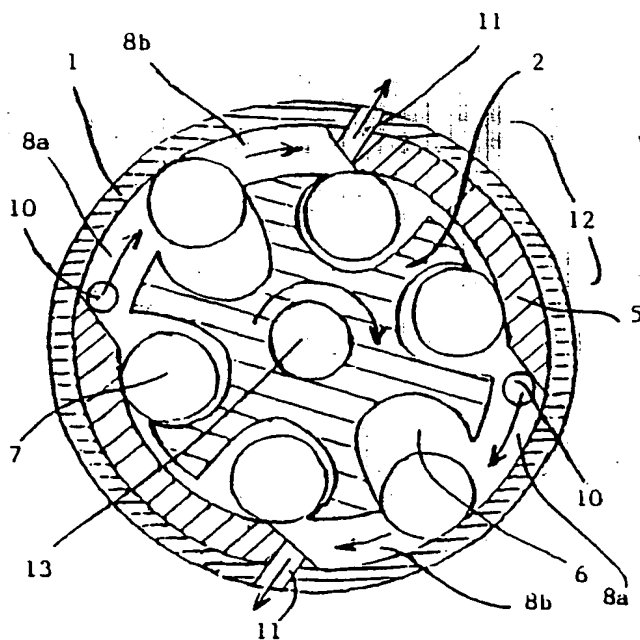


Fig. 3

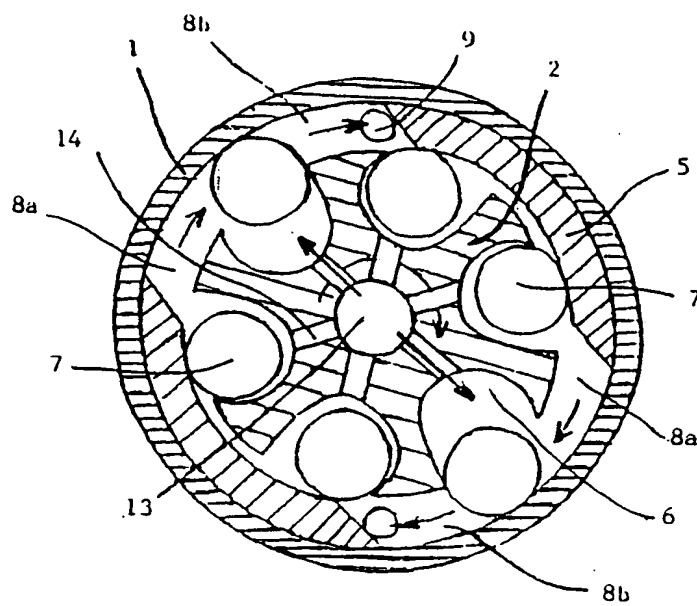


Fig. 4

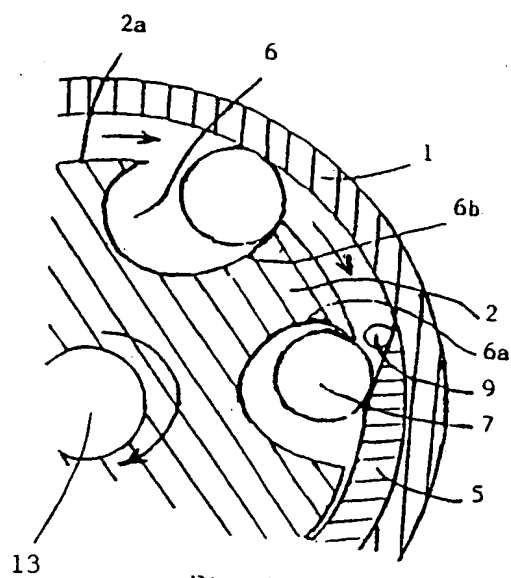


Fig. 5

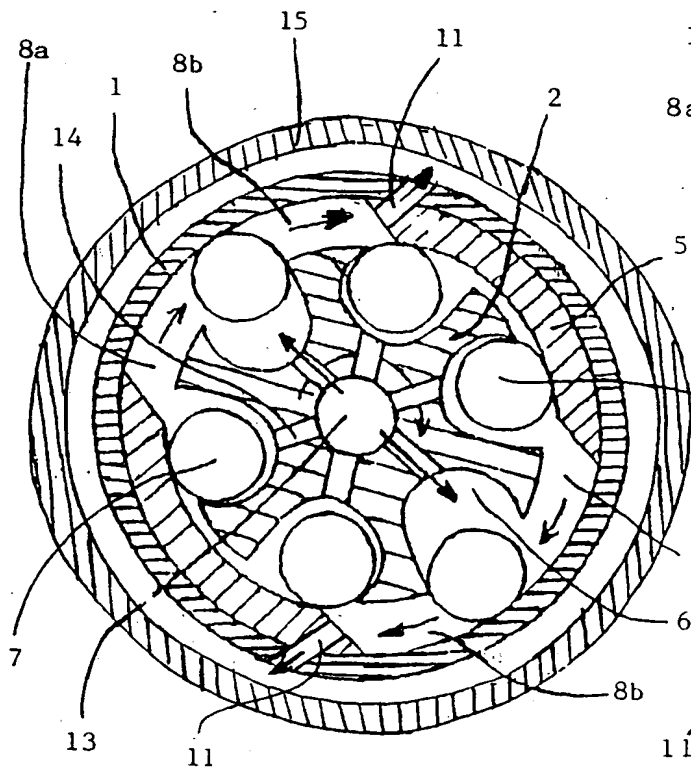


Fig. 6

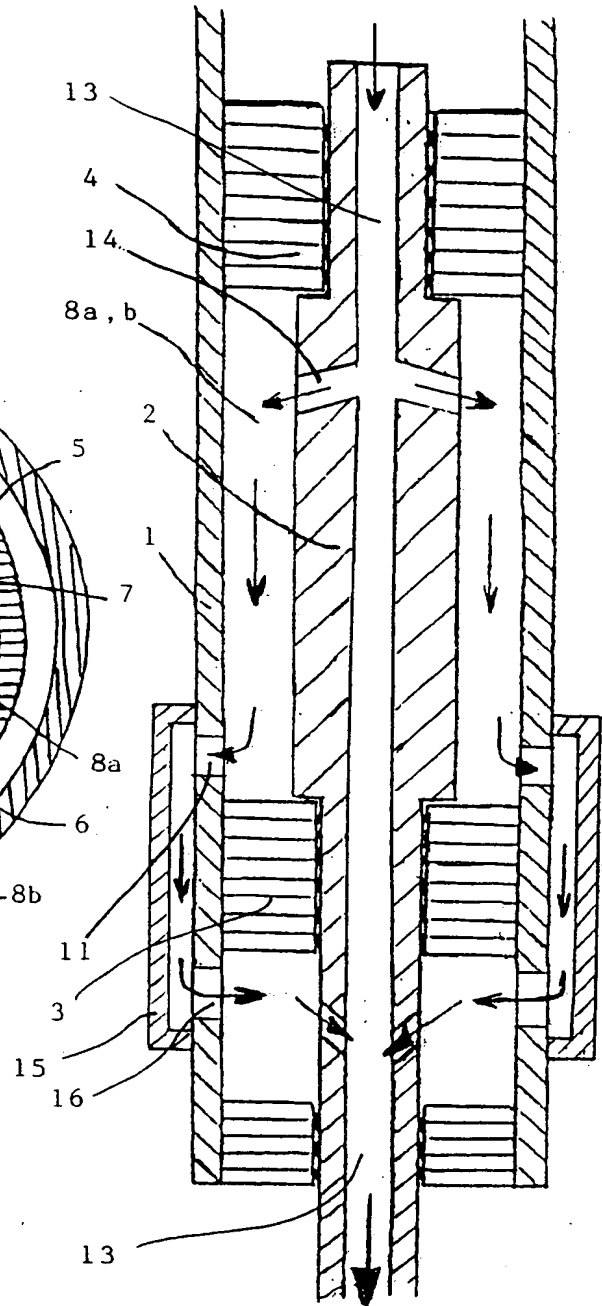


Fig. 7

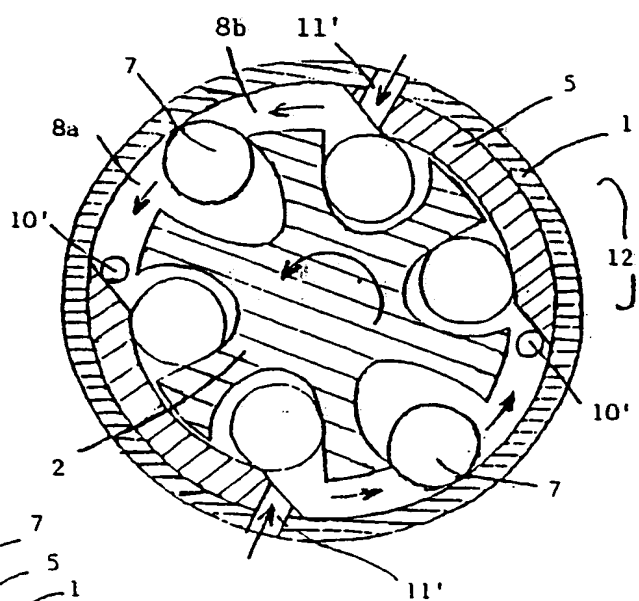


Fig. 9

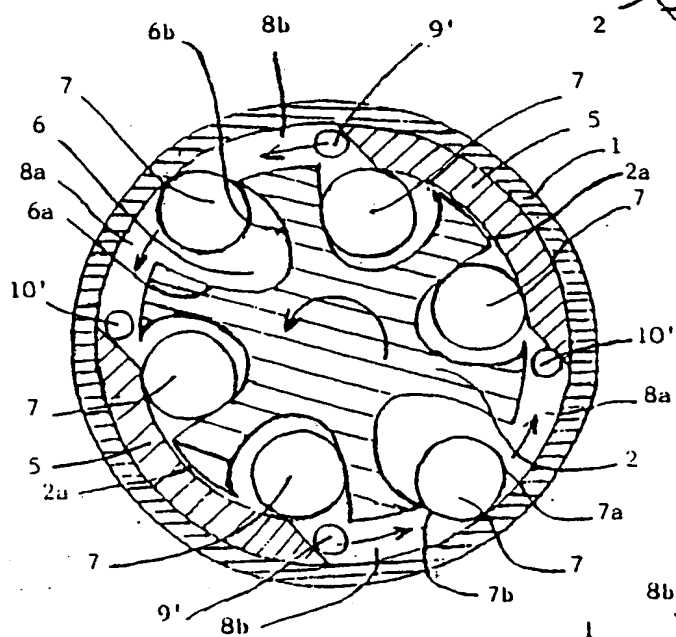


Fig. 8

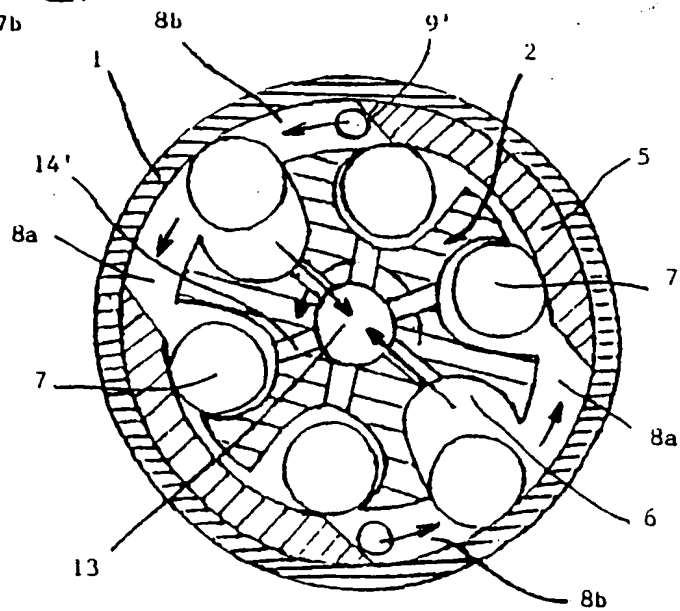


Fig. 10

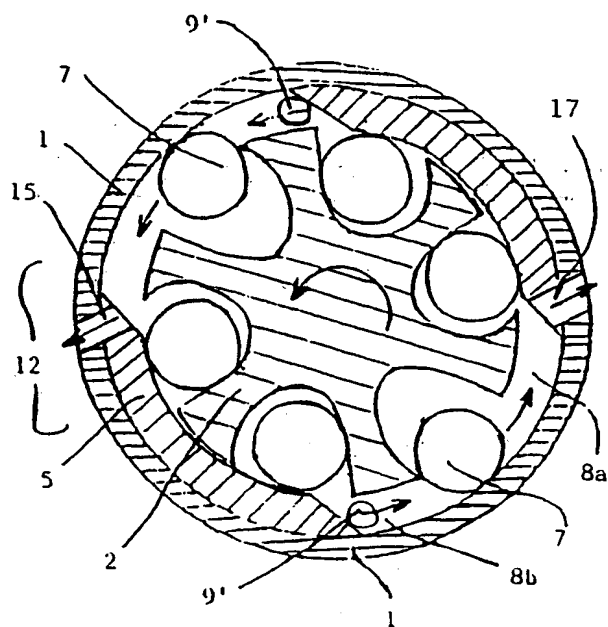


Fig. 11

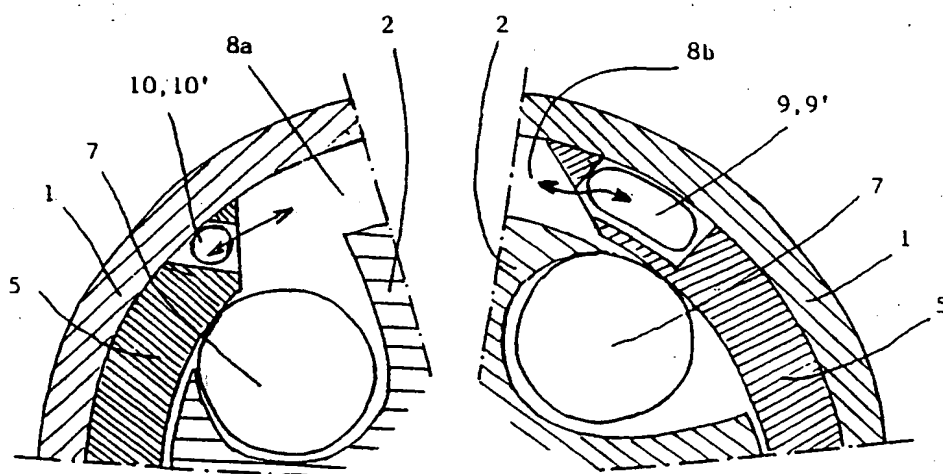


Fig. 12A

Fig. 12B

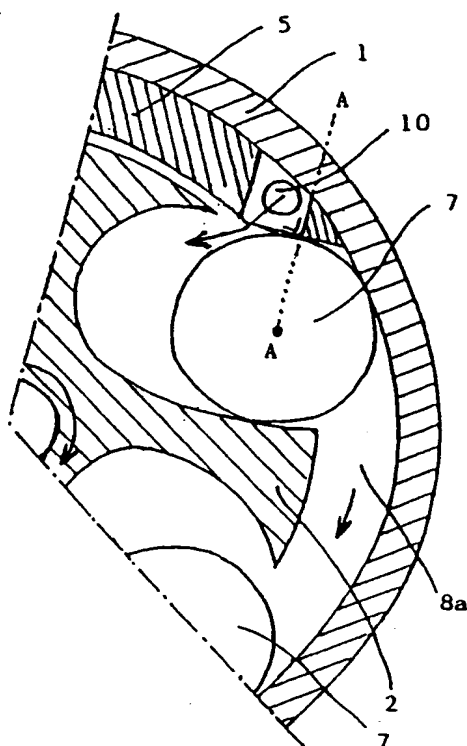


Fig. 13A

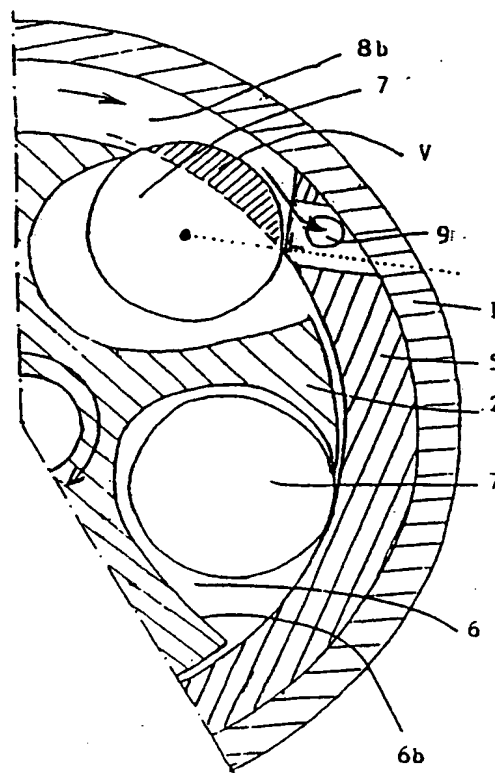


Fig. 13B

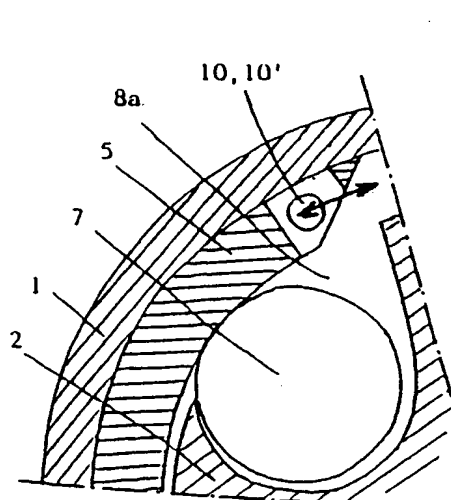


Fig. 14A

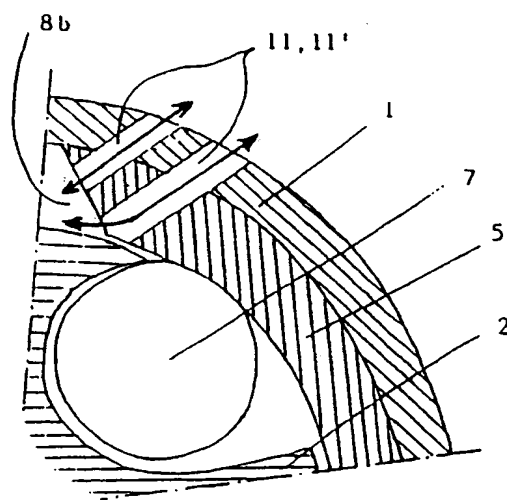


Fig. 14B

INTERNATIONAL SEARCH REPORT

National Application No

PCT/NL 98/00598

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 F04C11/00 E21B4/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 F04C E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 105 377 A (MAYALL WILLIAM) 8 August 1978	1, 14, 15
A	see column 3, line 6 - column 6, line 27; figures 1-5	11, 13
A	US 5 518 379 A (SUSMAN HECTOR D ET AL) 21 May 1996 see column 5, line 44 - column 7, line 29; figures 1-4	1, 3, 4, 9
A	GB 1 054 822 A (HYPRO INC.) 11 January 1967 see page 1, line 11 - page 4, line 27; figures 1-6	1, 11, 13, 14
A	US 1 790 460 A (CAPELIUSCHNICOFF M.A.) 27 January 1931 see the whole document	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 December 1998

Date of mailing of the international search report

29/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ingelbrecht, P

INTERNATIONAL SEARCH REPORT

information on patent family members

Inte Application No

PCT/NL 98/00598

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4105377	A	08-08-1978	NONE	
US 5518379	A	21-05-1996	US 5785509 A US 5833444 A AT 169718 T AU 691864 B AU 1459195 A CA 2181177 A CZ 9602080 A DE 69504028 D EP 0736128 A WO 9519488 A PL 315544 A	28-07-1998 10-11-1998 15-08-1998 28-05-1998 01-08-1995 20-07-1995 16-04-1997 17-09-1998 09-10-1996 20-07-1995 12-11-1996
GB 1054822	A		NONE	
US 1790460	A	27-01-1931	NONE	

THIS PAGE BLANK (USPTO)